

Quarkus - Using OpenAPI and Swagger UI

This guide explains how your Quarkus application can expose its API description through an OpenAPI specification and how you can test it via a user-friendly UI named Swagger UI.

Prerequisites

To complete this guide, you need:

- less than 15 minutes
- an IDE
- JDK 1.8+ installed with `JAVA_HOME` configured appropriately
- Apache Maven 3.5.3+

Architecture

In this guide, we create a straightforward REST application to demonstrate how fast you can expose your API specification and benefit from a user interface to test it.

Solution

We recommend that you follow the instructions in the next sections and create the application step by step. However, you can skip right to the completed example.

Clone the Git repository: `git clone https://github.com/quarkusio/quarkus-quickstarts.git`, or download an [archive](#).

The solution is located in the `openapi-swaggerui-quickstart` directory.

Creating the Maven project

First, we need a new project. Create a new project with the following command:

```
mvn io.quarkus:quarkus-maven-plugin:1.3.0.CR1:create \
  -DprojectId=org.acme \
  -DprojectArtifactId=openapi-swaggerui-quickstart \
  -DclassName="org.acme.openapi.swaggerui.FruitResource" \
  -Dpath="/fruits" \
  -Dextensions="resteasy-jsonb"
cd openapi-swaggerui-quickstart
```

This command generates the Maven project with a `/fruits` REST endpoint.

Expose a REST Resource

We will create a `Fruit` bean and a `FruitResource` REST resource (feel free to take a look to the [Writing JSON REST services guide](#) if you want more details on how to build a REST API with Quarkus).

```
package org.acme.openapi.swaggerui;

public class Fruit {

    public String name;
    public String description;

    public Fruit() {
    }

    public Fruit(String name, String description) {
        this.name = name;
        this.description = description;
    }
}
```

```

package org.acme.openapi.swaggerui;

import javax.ws.rs.GET;
import javax.ws.rs.POST;
import javax.ws.rs.DELETE;
import javax.ws.rs.Path;
import javax.ws.rs.Produces;
import javax.ws.rs.Consumes;
import javax.ws.rs.core.MediaType;
import java.util.Collections;
import java.util.LinkedHashMap;
import java.util.Set;

@Path("/fruits")
@Produces(MediaType.APPLICATION_JSON)
@Consumes(MediaType.APPLICATION_JSON)
public class FruitResource {

    private Set<Fruit> fruits = Collections.newSetFromMap
(Collection.synchronizedMap(new LinkedHashMap<>()));

    public FruitResource() {
        fruits.add(new Fruit("Apple", "Winter fruit"));
        fruits.add(new Fruit("Pineapple", "Tropical fruit"));
    }

    @GET
    public Set<Fruit> list() {
        return fruits;
    }

    @POST
    public Set<Fruit> add(Fruit fruit) {
        fruits.add(fruit);
        return fruits;
    }

    @DELETE
    public Set<Fruit> delete(Fruit fruit) {
        fruits.removeIf(existingFruit -> existingFruit.name
.contentEquals(fruit.name));
        return fruits;
    }
}

```

As we changed the API, we also need to update the test:

```

package org.acme.openapi.swaggerui;

import io.quarkus.test.junit.QuarkusTest;
import org.junit.jupiter.api.Test;

import javax.ws.rs.core.MediaType;

import static io.restassured.RestAssured.given;
import static org.hamcrest.CoreMatchers.is;
import static org.hamcrest.Matchers.containsInAnyOrder;

@QuarkusTest
public class FruitResourceTest {

    @Test
    public void testList() {
        given()
            .when().get("/fruits")
            .then()
            .statusCode(200)
            .body("$.size()", is(2),
                "name", containsInAnyOrder("Apple",
"Pineapple"),
                "description", containsInAnyOrder("Winter
fruit", "Tropical fruit"));
    }

    @Test
    public void testAdd() {
        given()
            .body("{\"name\": \"Pear\", \"description\":
\"Winter fruit\"}")
            .header("Content-Type", MediaType.APPLICATION_JSON)
            .when()
            .post("/fruits")
            .then()
            .statusCode(200)
            .body("$.size()", is(3),
                "name", containsInAnyOrder("Apple",
"Pineapple", "Pear"),
                "description", containsInAnyOrder("Winter
fruit", "Tropical fruit", "Winter fruit"));

        given()
            .body("{\"name\": \"Pear\", \"description\":
\"Winter fruit\"}")
            .header("Content-Type", MediaType.APPLICATION_JSON)
            .when()
            .delete("/fruits")

```

```
        .then()
        .statusCode(200)
        .body("$.size()", is(2),
                "name", containsInAnyOrder("Apple",
                "Pineapple"),
                "description", containsInAnyOrder("Winter
                fruit", "Tropical fruit"));
    }
}
```

Expose OpenAPI Specifications

Quarkus proposes a `smallrye-openapi` extension compliant with the [Eclipse MicroProfile OpenAPI](#) specification in order to generate your API [OpenAPI v3 specification](#).

You just need to add the `openapi` extension to your Quarkus application:

```
./mvnw quarkus:add-extension -Dextensions="openapi"
```

Now, we are ready to run our application:

```
./mvnw compile quarkus:dev
```

Once your application is started, you can make a request to the default `/openapi` endpoint:

```
$ curl http://localhost:8080/openapi
openapi: 3.0.1
info:
  title: Generated API
  version: "1.0"
paths:
  /fruits:
    get:
      responses:
        200:
          description: OK
          content:
            application/json: {}
    post:
      requestBody:
        content:
          application/json:
            schema:
              $ref: '#/components/schemas/Fruit'
      responses:
        200:
          description: OK
          content:
            application/json: {}
    delete:
      requestBody:
        content:
          application/json:
            schema:
              $ref: '#/components/schemas/Fruit'
      responses:
        200:
          description: OK
          content:
            application/json: {}
components:
  schemas:
    Fruit:
      properties:
        description:
          type: string
        name:
          type: string
```



If you do not like the default endpoint location `/openapi`, you can change it by adding the following configuration to your `application.properties`:

```
quarkus.smallrye-openapi.path=/swagger
```

Hit **CTRL+C** to stop the application.

Providing Application Level OpenAPI Annotations

There are some MicroProfile OpenAPI annotations which describe global API information, such as the following:

- API Title
- API Description
- Version
- Contact Information
- License

All of this information (and more) can be included in your Java code by using appropriate OpenAPI annotations on a JAX-RS `Application` class. Because a JAX-RS `Application` class is not required in Quarkus, you will likely have to create one. It can simply be an empty class that extends `javax.ws.rs.core.Application`. This empty class can then be annotated with various OpenAPI annotations such as `@OpenAPIDefinition`. For example:

```

@OpenAPIDefinition(
    tags = {
        @Tag(name="widget", description="Widget operations."),
        @Tag(name="gasket", description="Operations related to
gaskets")
    },
    info = @Info(
        title="Example API",
        version = "1.0.1",
        contact = @Contact(
            name = "Example API Support",
            url = "http://exampleurl.com/contact",
            email = "techsupport@example.com"),
        license = @License(
            name = "Apache 2.0",
            url = "http://www.apache.org/licenses/LICENSE-2.0.html
"))
)
public class ExampleApiApplication extends Application {
}

```

Loading OpenAPI Schema From Static Files

Instead of dynamically creating OpenAPI schemas from annotation scanning, Quarkus also supports serving static OpenAPI documents. The static file to serve must be a valid document conforming to the [OpenAPI specification](#). An OpenAPI document that conforms to the OpenAPI Specification is itself a valid JSON object, that can be represented in `yaml` or `json` formats.

To see this in action, we'll put OpenAPI documentation under `META-INF/openapi.yaml` for our `/fruits` endpoints. Quarkus also supports alternative [OpenAPI document paths](#) if you prefer.

```
openapi: 3.0.1
info:
  title: Static OpenAPI document of fruits resource
  description: Fruit resources Open API documentation
  version: "1.0"

servers:
  - url: http://localhost:8080/openapi
    description: Optional dev mode server description

paths:
  /fruits:
    get:
      responses:
        200:
          description: OK - fruits list
          content:
            application/json: {}
    post:
      requestBody:
        content:
          application/json:
            schema:
              $ref: '#/components/schemas/Fruit'
      responses:
        200:
          description: new fruit resource created
          content:
            application/json: {}
    delete:
      requestBody:
        content:
          application/json:
            schema:
              $ref: '#/components/schemas/Fruit'
      responses:
        200:
          description: OK - fruit resource deleted
          content:
            application/json: {}
components:
  schemas:
    Fruit:
      properties:
        description:
          type: string
        name:
          type: string
```

By default, a request to `/openapi` will serve the combined OpenAPI document from the static file and the model generated from application endpoints code. We can however change this to only serve the static OpenAPI document by adding `mp.openapi.scan.disable=true` configuration into `application.properties`.

Now, a request to `/openapi` endpoint will serve the static OpenAPI document instead of the generated one.

About OpenAPI document paths

Quarkus supports various paths to store your OpenAPI document under. We recommend you place it under `META-INF/openapi.yml`. Alternative paths are:

- `META-INF/openapi.yaml`
- `META-INF/openapi.yml`
- `META-INF/openapi.json`
- `WEB-INF/classes/META-INF/openapi.yml`
- `WEB-INF/classes/META-INF/openapi.yaml`
- `WEB-INF/classes/META-INF/openapi.json`



Live reload of static OpenAPI document is supported during development. A modification to your OpenAPI document will be picked up on fly by Quarkus.

Use Swagger UI for development

When building APIs, developers want to test them quickly. [Swagger UI](#) is a great tool permitting to visualize and interact with your APIs. The UI is automatically generated from your OpenAPI specification.

The Quarkus `smallrye-openapi` extension comes with a `swagger-ui` extension embedding a properly configured Swagger UI page.

By default, Swagger UI is only available when Quarkus is started in dev or test mode.

If you want to make it available in production too, you can include the following configuration in your `application.properties`:



```
quarkus.swagger-ui.always-include=true
```

By default, Swagger UI is accessible at `/swagger-ui`.

You can update this path by setting the `quarkus.swagger-ui.path` property in your `application.properties`:

```
quarkus.swagger-ui.path=/my-custom-path
```



The value `/` is not allowed as it blocks the application from serving anything else.

Now, we are ready to run our application:

```
./mvnw compile quarkus:dev
```

You can check the Swagger UI path in your application's log:


```
00:00:00,000 INFO [io.qua.swa.run.SwaggerUIServletExtension]  
Swagger UI available at /swagger-ui
```

Once your application is started, you can go to <http://localhost:8080/swagger-ui> and play with your API.

You can visualize your API's operations and schemas.

The screenshot shows the Swagger UI interface in a browser. The address bar shows `localhost:8080/swagger-ui/#/default/get_fruits`. The main content area displays the API documentation for the `/openapi` endpoint. The title is **Generated API** with a `1.0 OAS3` badge. Below the title, there is a section for **default** operations. The first operation is a **GET /fruits** endpoint. It has no parameters and a response of `200` with a description of `OK`. The response media type is set to `application/json`. Below the operations, there are sections for **POST /fruits** and **DELETE /fruits**. At the bottom, there is a **Schemas** section showing a `Fruit` schema with fields `description` (string) and `name` (string).

You can also interact with your API in order to quickly test it.

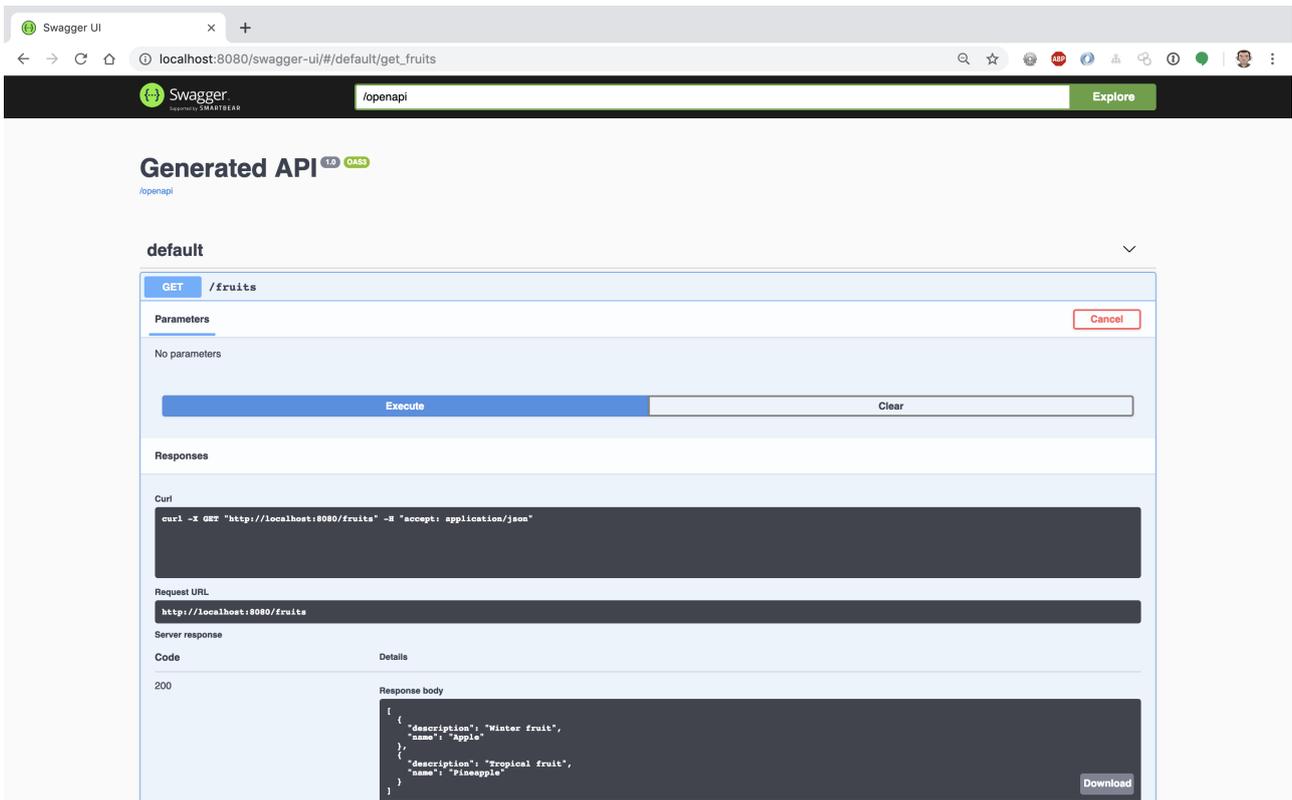

Hit **CTRL+C** to stop the application.

Configuration Reference

OpenAPI

🔒 Configuration property fixed at build time - All other configuration properties are overridable at runtime

Configuration property	Type	Default
🔒 <code>quarkus.smallrye-openapi.path</code> The path at which to register the OpenAPI Servlet.	string	<code>/openapi</code>

Swagger UI

🔒 Configuration property fixed at build time - All other configuration properties are overridable at runtime

Configuration property	Type	Default
------------------------	------	---------

<p> <code>quarkus.swagger-ui.path</code></p> <p>The path where Swagger UI is available. The value <code>/</code> is not allowed as it blocks the application from serving anything else.</p>	string	<code>/swagger-ui</code>
<p> <code>quarkus.swagger-ui.always-include</code></p> <p>If this should be included every time. By default this is only included when the application is running in dev mode.</p>	boolean	<code>false</code>
<p> <code>quarkus.swagger-ui.enable</code></p> <p>If Swagger UI should be enabled. By default, Swagger UI is enabled.</p>	boolean	<code>true</code>